


Blade Lifter

This system of tilting the blades during transport reduces the environmental impact, avoiding changes in road layout.

Mega blades


The system makes it possible to transport blades up to 80 metres long on roads with sharp bends.

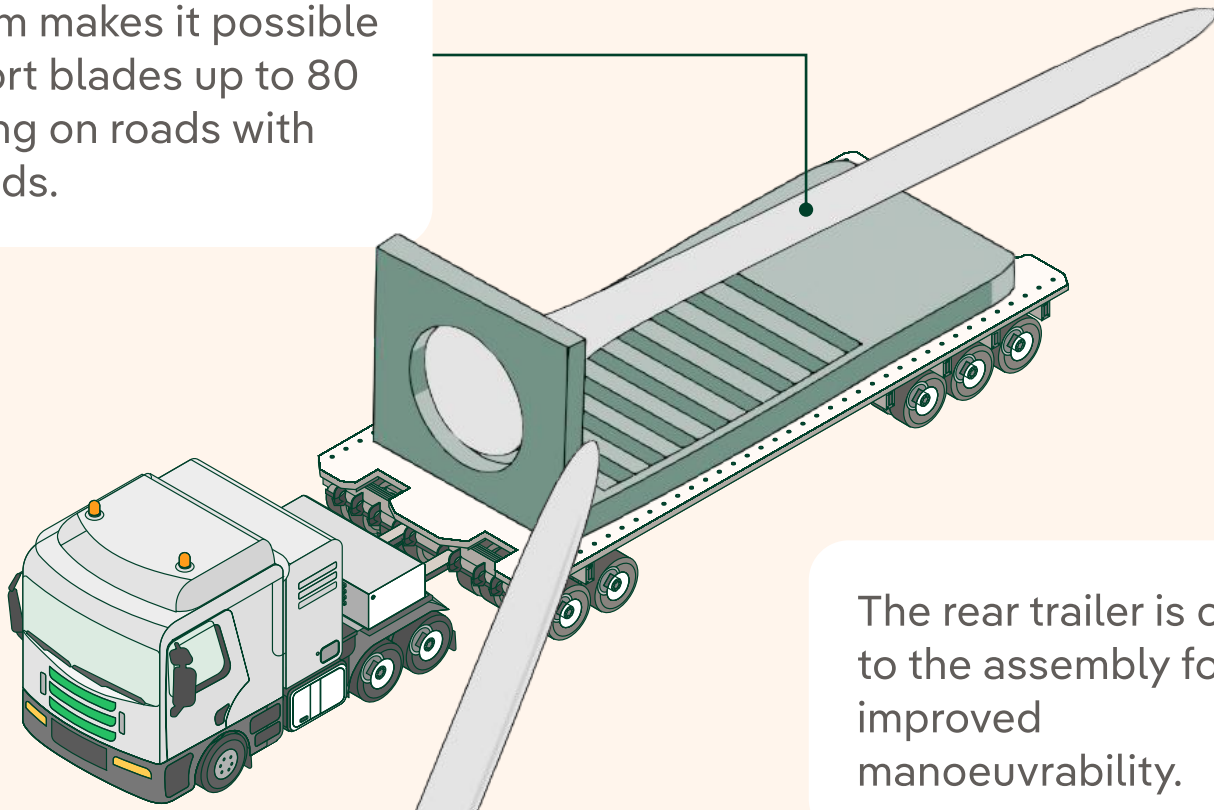

The rear trailer is coupled to the assembly for improved manoeuvrability.

Inclination

The blade is tilted up to 60° above the horizontal axis, shortening the assembly.

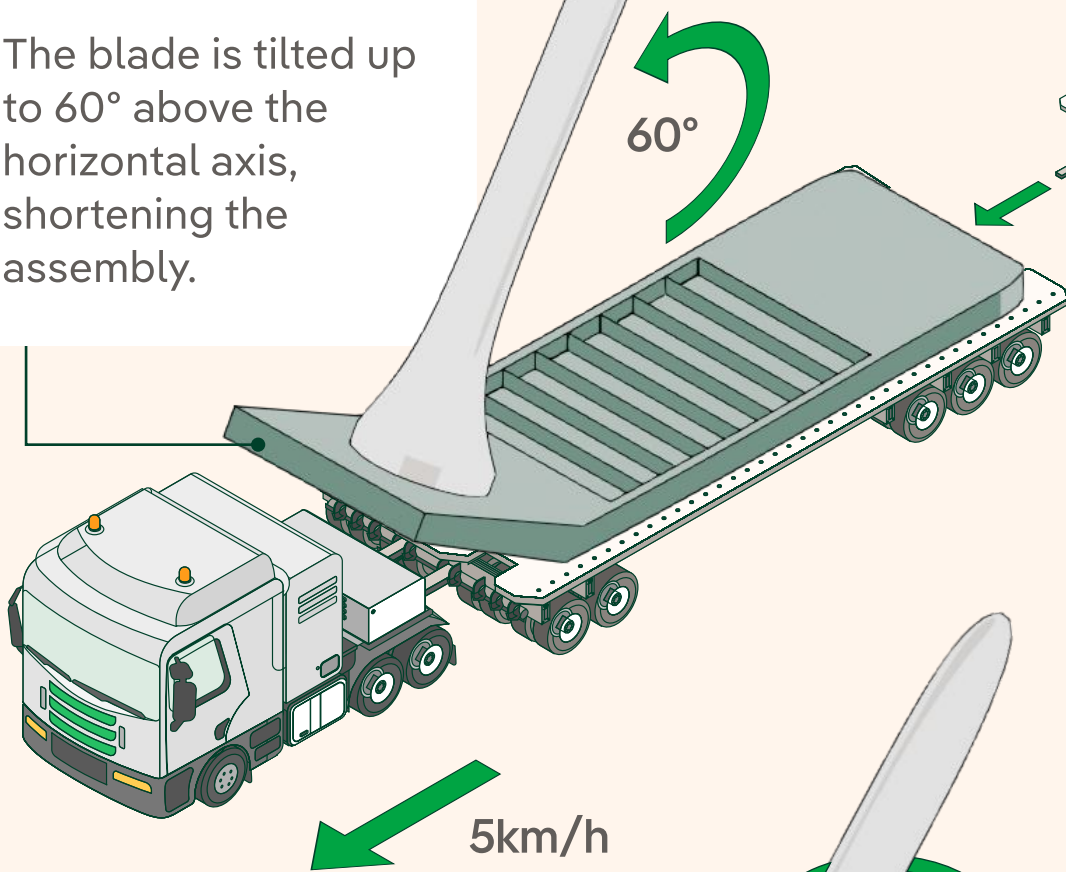


10 m/s

Maximum wind speed for transporting the lifted blade.

Lateral rotation

The blades can be rotated 360° while driving (e.g. to avoid the wind). A third vertical rotation axis allows a lateral angle of 20°. A very useful option in heavily built-up areas.

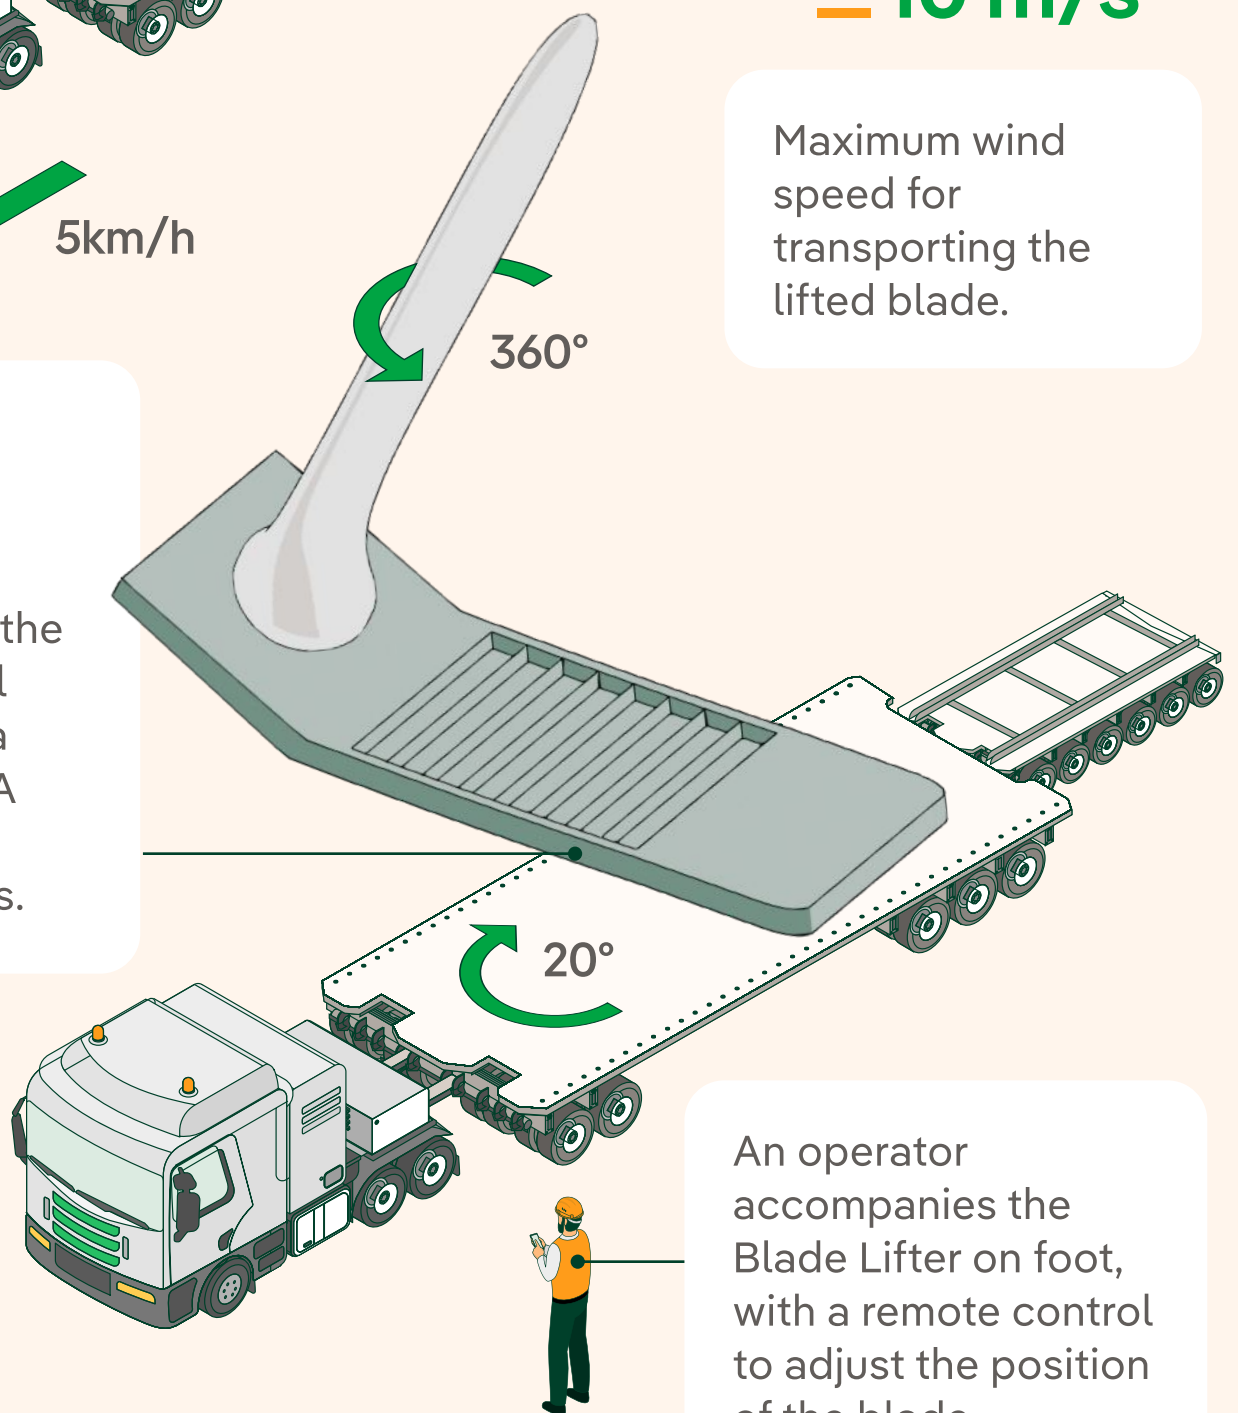

An operator accompanies the Blade Lifter on foot, with a remote control to adjust the position of the blade.